
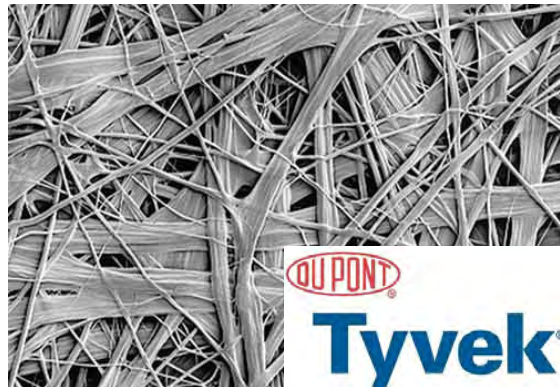


Typical Application & Characteristics for 1073B Tyvek® Steam Sterilization Wrapper:

- Designed For Steam Sterilization
- Recommended For Use In Conjunction With A Secondary Tyvek® Sterilization Pouch
- Hydrophobic
- Excellent Microbial Barrier
- Resists Tearing and Punctures
- Lint-Free – Category 1 (Helmke Drum)
- Manufactured and Packaged In A Controlled Cleanroom
- Certificates of Conformance Sent With Shipment

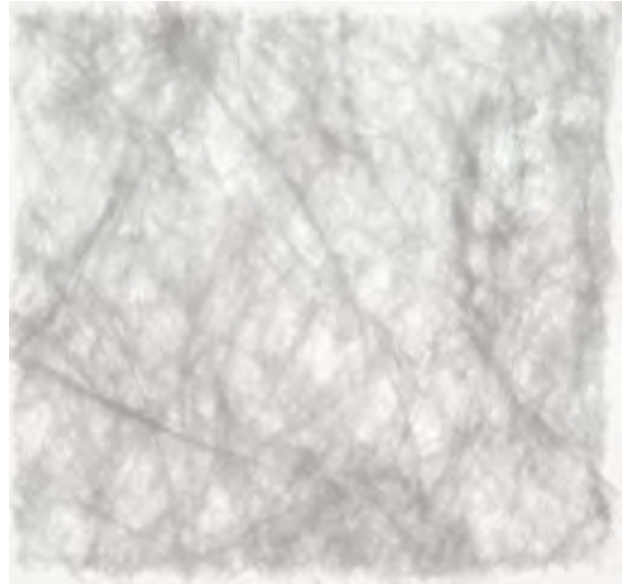

PROPERTY	UNITS	TEST METHOD	TYPICAL VALUES 1073B Tyvek®
Seal Strength	Lbs/inch/width	F-88	>5
Basis Weight	oz/yd ²	ASTM D3776 EN ISO 536	2.2
Total Thickness	Mls	D 1777-64	7.0
Microbial Barrier	Log Reduction Value (LRV)	ASTM F 1608	5.2
Bendsten Air Permeability	mL/min	ISO 5636-3	572
Moisture Vapor Transmission Rate	g/m ² /24 hr	TAPPI T523	1615
Hydrostatic Head	Inches H ₂ O	AATCC TM 127 EN20811	58
Tensile Strength MD	lb/in.	ASTM D5035 EN ISO 1924-2	44
Tensile Strength CD	lb/in.	ASTM D5035 EN ISO 1924-2	45
Elongation MD	%	ASTM D5035 EN ISO 1924-2	20
Elongation CD	%	ASTM D5035 EN ISO 1924-2	24
Elmendorf Tear, MD	lbs	ASTM 1424 EN 21974	0.7
Elmendorf Tear, CD	lbs	ASTM 1424 EN 21974	0.8
Mullen Burst	psi	ASTM D774 ISO 2758	176
Spencer Puncture	in.-lbf/in. ²	ASTM 3420	50
Opacity	%	TAPPI T425 ISO 2471	91

Ordering
Information
for Common
Sizes:

ItemCode	Dimensions
MGTVKSHEET0303	3" x 3"
MGTVKSHEET0404	4" x 4"
MGTVKSHEET0606	6" x 6"
MGTVKSHEET07-507-5	7.5" x 7.5"
MGTVKSHEET0909	9" x 9"
MGTVKSHEET0911	9" x 11"
MGTVKSHEET1010	10" x 10"
MGTVKSHEET1212	12" x 12"
MGTVKSHEET1515	15" x 15"

ItemCode	Dimensions
MGTVKSHEET1616	16" x 16"
MGTVKSHEET1818	18" x 18"
MGTVKSHEET2020	20" x 20"
MGTVKSHEET2424	24" x 24"
MGTVKSHEET3030	30" x 30"
MGTVKSHEET4040	40" x 40"
MGTVKSHEET4080	40" x 80"
MGTVKSHEET6060	60" x 60"
MGTVKSHEET60140	60" x 140"



1591 Hylton Road
Pennsauken, NJ 08110
(800) 663-5439
www.keystoneCRP.com