
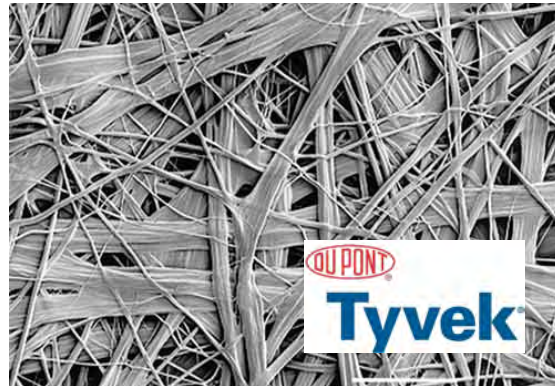


Typical Application & Characteristics for 1422A Tyvek® Steam Sterilization Wrapper:

- Designed For Steam Sterilization
- Recommended For Use In Conjunction With A Secondary Tyvek® Sterilization Pouch
- Hydrophobic
- Excellent Microbial Barrier
- Resists Tearing and Punctures
- Lint-Free – Category 1 (Helmke Drum)
- Manufactured and Packaged In A Controlled Cleanroom
- Certificates of Conformance Sent With Shipment

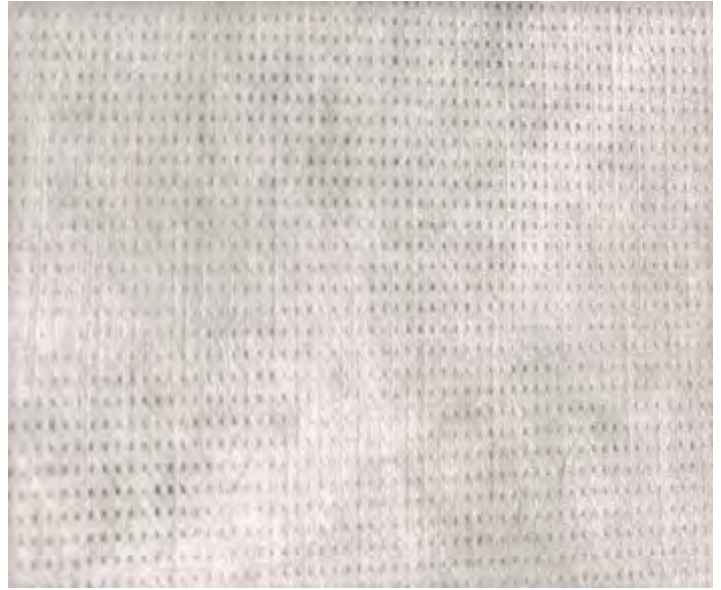

PROPERTY	UNITS	TEST METHOD	TYPICAL VALUES 1422A Tyvek®
Basis Weight	g/m ²	EN ISO 536	41
Total Thickness	μ	EN 20534	130
Air Permeability	s	ISO 5636-5	20
Water Vapor Permeability	G/M2/24 HR	ASTM 398	1700
Hydrostatic Head	cm H ₂ O	ISO 811	120
Trapezoidal Tear MD/CD	N	ISO 9073-4	26.1/30.6
Linting Propensity	Rating	BS 6909 (Shirley Method 21)	Pass Rating: Excellent
Burst Resistance	kPa	ISO 2960 (50 cm ²)	108
Puncture Resistance	N	EN 863	10.8
Melting Point	C °		135

Ordering
Information
for Common
Sizes:

ItemCode	Dimensions
T2ASHEET0303	3" x 3"
T2ASHEET0404	4" x 4"
T2ASHEET0606	6" x 6"
T2ASHEET07-507-5	7.5" x 7.5"
T2ASHEET0909	9" x 9"
T2ASHEET0911	9" x 11"
T2ASHEET1212	12" x 12"
T2ASHEET1515	15" x 15"
T2ASHEET1818	18" x 18"

ItemCode	Dimensions
T2ASHEET2020	20" x 20"
T2ASHEET2424	24" x 24"
T2ASHEET3030	30" x 30"
T2ASHEET4040	40" x 40"
T2ASHEET4080	40" x 80"
T2ASHEET6060	60" x 60"
T2ASHEET60140	60" x 140"
T2ASHEET7272	72" x 72"
T2ASHEET8494	84" x 94"

KEYSTONE

CLEANROOM PRODUCTS

1591 Hylton Road
Pennsauken, NJ 08110
(800) 663-5439
www.KeystoneCRP.com